

ADSL2+/VDSL2

4 Ethernet Port | VoIP | WiFi | USB Host

VI-3225u

Wireless VoIP IAD



The VI-3225u is a leading Multi-DSL WLAN VoIP Integrated Access Device (IAD). It is 802.11n compliant, supports ADSL2+, VDSL2 and facilitates predictable, real-time, toll-quality voice over the Internet.

VDSL2 is a brand new standard and technology, perfect for triple play (Video, Voice and Data) applications. The VI-3225u comes with four 10/100 Ethernet LAN ports, one 10/100/1000 Base-T Gigabit Ethernet WAN and two USB hosts, combining wired LAN connectivity, a 802.11n WiFi WLAN Access Point (AP) for wireless connectivity and VoIP via standard analog phones.

The VI-3225u is a cost effective solution designed to meet the needs of most ISPs and carriers. It is capable of serving as the one DSL device for covering end users in different loop range areas. Deploying VI-3225u is cost effective for ISPs and carriers because deploying a single CPE DSL device with multiple profile support minimizes the number of required upgrades.

FEATURES

- Multi-DSL VoIP and Router Integrated
- Supports both ADSL2+ and VDSL2 (up to 17a Profile)
- Automatically switches to ADSL2+ /VDSL2 according to the port setting of DSLAM
- IP QoS
- UPnP
- Integrated 802.11 b/g/n AP
- WAP and 802.1x
- RADIUS client
- IP/MAC address filtering
- Static route/RIP/RIP v2 routing functions
- IGMP Proxy and fast leave
- DHCP Server/Relay/Client
- Supports QoS (Quality of Service) for voice
- Supports caller ID display and restriction
- Supports call hold, call waiting, call forwarding, call transfer, 3-way conference
- Supports direct number dialing
- Supports T.38
- Supports VPN Pass-Through
- Supports day-time parental control
- Supports TR-069/TR-098/TR-104/TR-111
- Supports remote administration, automatic firmware upgrade and configuration
- User friendly color connections

VI-3225u

4 Ethernet Port | VoIP | WiFi | USB Host

SPECIFICATIONS

Hardware

- RJ-11 X1 for ADSL2+/VDSL2,
- RJ-45 X 4 for LAN,
- RJ-45 X 1 for Giga WAN,
- Reset Button X 1,
- WPS button X 1
- Wi-Fi On/Off button X 1
- Wi-Fi Antennas X 2
- Power switch X 1
- USB Host X 2

WAN

- ADSL standard
ITU-T G.992.5, ITU-T G.992.3, ITU-T G.992.1, ANSI T1.413 Issue 2, AnnexM
- ADSL2+
Downstream : 24 Mbps Upstream : 1.3 Mbps
- VDSL2 standard
ITU-Y G.993.2 (supporting profile 8a, 8b, 8c, 8d, 12a, 12b, 17a)
- VDSL2
Downstream : 100 Mbps Upstream : 60 Mbps

LAN

- IEEE 802.3, IEEE 802.3u
- 10/100 BaseT auto-sense
- Support MDI/MDI-X

WLAN

- IEEE 802.11n draft, backward compatible with 802.11g/b
- 64, 128-bit Wired Equivalent Privacy (WEP) Data Encryption
- 11 Channels (US, Canada)/ 13 Channels (Europe)/ 14 Channels (Japan)
- Up to 300 Mbps data rate
- MAC address filtering, WEP, WPA, IEEE 802.1x
- 10, 25, 50, 100mW @ 22MHz channel bandwidth output power level can be selected according to the environment

ATM Attributes

- RFC 2364 (PPPoA), RFC 2684 (RFC 1483) Bridge/Route; RFC 2516 (PPPoE); RFC 1577 (IPoA)
- Support 16 PVCs
- AAL5
- UBR/CBR/VBR
- UNI 3.1/4.0
- OAM F4/F5

Management

- SNMP, TR-069/TR-098/TR-104/TR-111, SNMP, Telnet, Web-based management, Configuration backup and restoration. Software upgrade via HTTP, TFTP server, or FTP server.

Bridge Functions

- IEEE 802.1d
- VLAN support
- Spanning Tree Algorithm
- IGMP Proxy

Routing Functions

- Static route, RIP, and RIPv2, NAT/PAT, DHCP Server/DHCP Relay, DNS Proxy, ARP

Security Functions

- PAP, CHAP, TCP/IP/Port filtering rules, Port triggering/Forwarding, Packet and MAC address filtering, access control, SSH

QoS

- L3 policy-based QoS, IP QoS, ToS

Voice Functions

- SIP: RFC 3261
- Codec: G.711, G.723.1, G.726, G.729ab
- RTP: RFC 1889
- SDP: RFC 2327
- Caller ID
- Echo cancellation: G.168
- Silence suppression

Power Supply


- External power adapter: 12VDC/ 2A

Environmental Conditions

- Operating temperature: 0 ~ 40 degrees Celsius
- Relative humidity: 5 ~ 95% (non-condensing)

Dimensions

- 256.2mm(W) X 47.9mm(H) X 166mm(D)

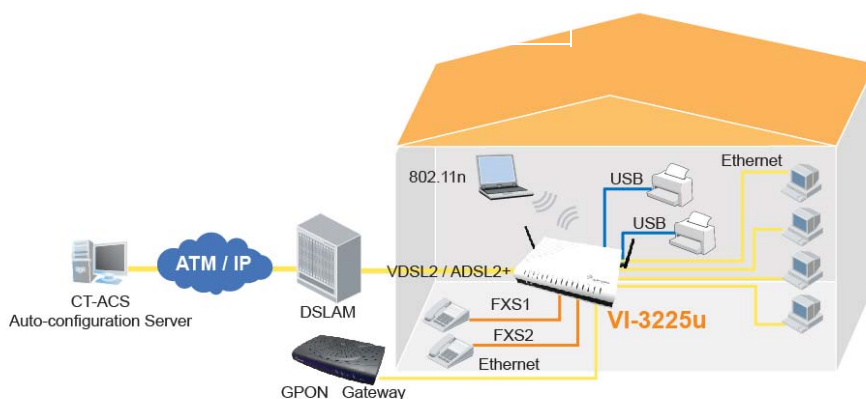

COMTREND CORPORATION

Taiwan:
3F-1, No. 10, Lane 609, Chongxin Road, Section 5,
Sanchong Dist, New Taipei City 24159, Taiwan
Tel: 886-2-2999-8261
Fax: 886-2-2999-8497

China:
1F, No. 88 Building M1 East QianJin Road,
Kunshan City, PC: 215300, China
Tel: 86-512-57383156
Fax: 86-512-57383155

Spain:
Edif. América II C/Prócion,7 portal 3 bajo H 28023 Madrid,
Spain
Tel: 34-917990403
Fax: 34-913510999

France:
8, Rue Edouard Naud
92130 Issy-Les-Moulineaux, France
Tel: 33-1-78463600
Fax: 33-1-78463601

Czech Republic:
TOKOVO Jankovcova 1518/2, 170 00, Prague 7,
Czech Republic
Tel: 420-266-782040
Fax: 420-266-782990

USA & Canada:
16 Goodyear, Suite 120, Irvine, CA 92618
Tel: 1-949-7539640
Fax: 1-949-7539020

Brazil:
Av. Brig. Luis Antonio, 2466 Room 64 - Jardim Paulista -
São Paulo - SP - zip code: 01402-000
Tel: 00 55 11 3052-2295
Fax: 00 55 11 3052-2295