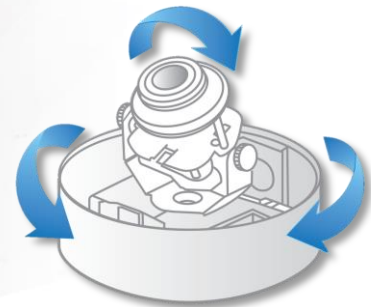


**REMOTE ZOOM
VANDAL DOME****IP CAMERA**

3- Axis Rotation!
Easily Adjust the Camera to the
Optimal Viewing Angle

PRODUCT OVERVIEW

Comtrend's VD-21IRVF Remote Zoom Dome IP Camera is a full HD IP Camera made with an aesthetic design featuring extreme durability to protect against natural and criminal elements. It includes a motorized lens for remote zoom/focus and can be adjusted through the UI remotely with autofocus. The VD21IRVF is vandal proof IK10 and weather proof IP67 to protect against natural and criminal elements.

KEY BENEFITS

Remote Zoom/Focus Feature

Reduce installation time by remotely adjusting the zoom/focus of the VD-21IRVF through the UI.

Flexible Connectivity

The VD-21IR offers a PoE option for easy deployment in hard to reach locations

Local Recording





Equipped with a MicroSD slot, video can be stored locally to ensure constant recording in case of a network interruption or failure.

Supports Multiple Video Streams

Can simultaneously stream H.264, MPEG-4, and MJPEG to provide both high-quality and bandwidth-efficient formats

VD-21IRVF

Product Comparison

	MD-21 Mini Dome IP Camera	MB-21IR Outdoor Bullet IP Camera	VD-21IR Compact Vandal Dome IP Camera	★ VD-21IRVF Remote Zoom Dome IP Camera
Product Image				
Image Sensor	1/ 2.5"	1/ 2.5"	1/ 2.5"	1/ 3" CMOS
Lens	f=3.6mm	f=3.6mm (IR Support)	f-3.6mm (IR Support)	f= 3~10.5mm (Motor Lens)
Iris (F No.)	F1.8	F1.8	F1.8	F1.4
Angle of View	H: 69.55 degrees, V: 37.44 degrees	H: 65.6 degrees, V: 38.3 degrees	H: 69.55 degrees, V: 37.44 degrees	H: 72.9~ 28.07 degrees, V: 40.27~15.81 degrees
Day & Night (ICR)		Yes	Yes	Yes
IR Distance (Max.)		20M, 850nm	20M, 850nm	40M, 850nm
Min. Illuminators	0.05 Lux (Color)	0.05 Lux (Color) 0 Lux (IR On, B/W)		
Video Codec	H.264/MPEG-4, MJPEG			
Video Resolution	H.264: 30fps @ 1920 x 1080 (max. 1080P) MPEG-4: 20fps @ 1920 x 1080 (Max. 1080P)			
WDR Tech		WDR		WDR Pro
Local Storage	Micro SD Slot x 1, Support SD/SDHC, Max. 32GB			
Audio	One-way		Two-way	Two-way (G.711 μ-Law)
Network	Fast Ethernet (10/100Mbps, RJ-45)			
Protocols	TCP/IP, IPv4, IPv6, UDP, ICMP, HTTP, HTTPS, DHCP NTP, DNS, DDNS, SMTP, FTP, PPPoE, Samba Bonjour, UPnP, RTP, RTSP, RTCP			
Weatherproof		IP66	IP66	IP67
Vandal Proof			IK8	IK10
Power Supply	PoE	PoE/DC12V	PoE/ DC12V	PoE/ DC12V
Consumption	Max. 3.8W	Max. 6W	Max. 6.6W	Max. 6.6W
Dimensions	3.74in. (Ø) x 4.5in (L)	2.9in. (Ø) x 7.5in. (L)	4.3in. (Ø) x 4.5in (L)	5.7in. (Ø) x 4.5in (L)
Weight	6.4oz	1.34lb	11oz	2.1lb
Warranty	2 Years	2 Years	2 Years	2 Years