

# G.hn over Coax Head End 4 ports

## Distribution Point Unit

G.hn wave2 over coaxial | SFP+ Uplink

### MDU-4620



The **MDU-4620** is a revolutionary G.hn wave2 over coaxial cable Head End with a multiple purpose uplink/coaxial hybrid approach to provide the broadband service under the current coaxial cable network to the cable TV subscriber.

The MDU-4620 design meets the requirement to be located in a building basement, the stairway of an apartment building or inside the FTTC cabinet.

As a G.hn wave2 over coax HE (Head End) the MDU-4620 includes an SFP+ cage as the uplink interface (for GPON/XGS-PON network as an ONU, or 10G AE/10GBase-T Ethernet) and 4 ports G.hn wave2 over coaxial interfaces. Combining the Fiber/Ethernet, coaxial cable and broadband technologies the MDU-4620 system supports 3 kinds of applications to serve a maximum 64 end users thru single, dual or quad coaxial cables for multiple HDTV, Internet Gaming & other high bandwidth applications. In addition, the MDU-4620 can co-exist with the Cable TV program service.

#### KEY FEATURES

- **G.hn wave2 over coaxial** cable technology
- One MDU-4620 connects to **64 units** G.hn over coaxial wave2 CPEs
- **3** types of connection to CPEs via **Single, Dual or Quad** coaxial cables
- Max. **1.7Gbps** Aggregated Broadband service
- **Auto** configuration
- **Web GUI** for friendly and easy operation network management
- Supports **SNMP** for remote network management
- Value added Broadband service over current **CATV** network
- Uplink interface complies with **XGS-PON ONU/GPON ONU/ 10G AE/ 1G AE/10GBase-T/1GBase-T**

# MDU-4620

G.hn wave2 over coaxial | SFP+ Uplink

SPECIFICATIONS	
<b>Hardware</b>	<ul style="list-style-type: none"><li>▪ 1x SFP+ Uplink (for GPON ONU as default, XGS-PON ONU/10 AE/10Gbase-T Ethernet are optional)</li><li>▪ 4x F-connector (for G.hn wave2 broadband &amp; CATV out)</li><li>▪ 4x F-connector (for CATV input)</li><li>▪ AC Input (full range, 50/60Hz)</li></ul>
<b>Fiber Uplink</b>	<ul style="list-style-type: none"><li>▪ 10G AE IEEE 802.3ae base-LR/LW</li><li>▪ GPON/XGS-PON Compliant ITU-T G.984.1, G.984.2, G.984.3 Standard Supports ITU-T G.988 OMCI Class B+ Compliant Optical Transceiver Line rate GPON 2.5Gbps Downstream, 1.25Gbps Upstream Line rate XGS-PON 10Gbps Downstream, 10Gbps Upstream Max. 20KM Distance Reach thru ITU-T G.652 Compliant Single Mode Fiber AES-128 Decryption with key generation and switching FEC (Forward Error Correction) Supported Flexible mapping between GEM ports and T-CONTs Mapping of GEM port into a T-CONT with priority queues based scheduling DBA reporting in status indications in the PLOu, and by piggyback reports in the DBRu (mode 0) 802.1p service mapping profile on U/S</li></ul>
<b>Mechanical</b>	<ul style="list-style-type: none"><li>▪ IP67 waterproof, dust proof outdoor housing</li><li>▪ No fan cooling, Anti-dust, Bug-proof</li><li>▪ Dimensions: 265mm x 220mm x 80mm</li></ul>
<b>G.hn</b>	<ul style="list-style-type: none"><li>▪ Supports ITU-T G.9960: Unified high-speed wireline-based home networking transceivers – System Architecture and Physical Layer specification</li><li>▪ Supports ITU-T G.9961: Unified high-speed wireline-based home networking transceivers – Data Link Layer specification</li><li>▪ Supports ITU-T G.9962: Unified high-speed wireline-based home networking transceivers – Management specification</li><li>▪ Supports ITU-T G.9963: Unified high-speed wireline-based home networking transceivers – Multiple input/multiple output specification</li><li>▪ Supports ITU-T G.9964: Unified high-speed wireline-based home networking transceivers – Power spectral density specification</li></ul>
<b>SW Features</b>	<ul style="list-style-type: none"><li>▪ Supports VLAN Trunk</li><li>▪ Supports IEEE802.1ad VLAN Stacking function</li><li>▪ Supports four priority queues for each subscriber-side interface</li><li>▪ Supports VLAN tagging, VLAN filtering (based on Trunk implementation) function</li><li>▪ Supports Web GUI for monitoring</li><li>▪ Supports PPPoE IA</li><li>▪ Supports Up Stream/Down Stream bandwidth configuration</li><li>▪ Supports SNMP v2 and v3 Management</li><li>▪ Supports CLI Management via SSH or Local Console Port</li><li>▪ Supports DHCP Relay Agent Information Option (Option 82)</li><li>▪ Supports Management-VLAN List</li><li>▪ Supports VLAN Redirect</li></ul>


# MDU-4620

G.hn wave2 over coaxial | SFP+ Uplink

## SPECIFICATIONS

<b>Frequency</b>	250MHz to 1.2GHz
<b>ENVIRONMENT</b>	
<b>Operating Temperature</b>	-20°C ~ +70°C
<b>Relative Humidity</b>	100% condensing, fully submersible

## Applications

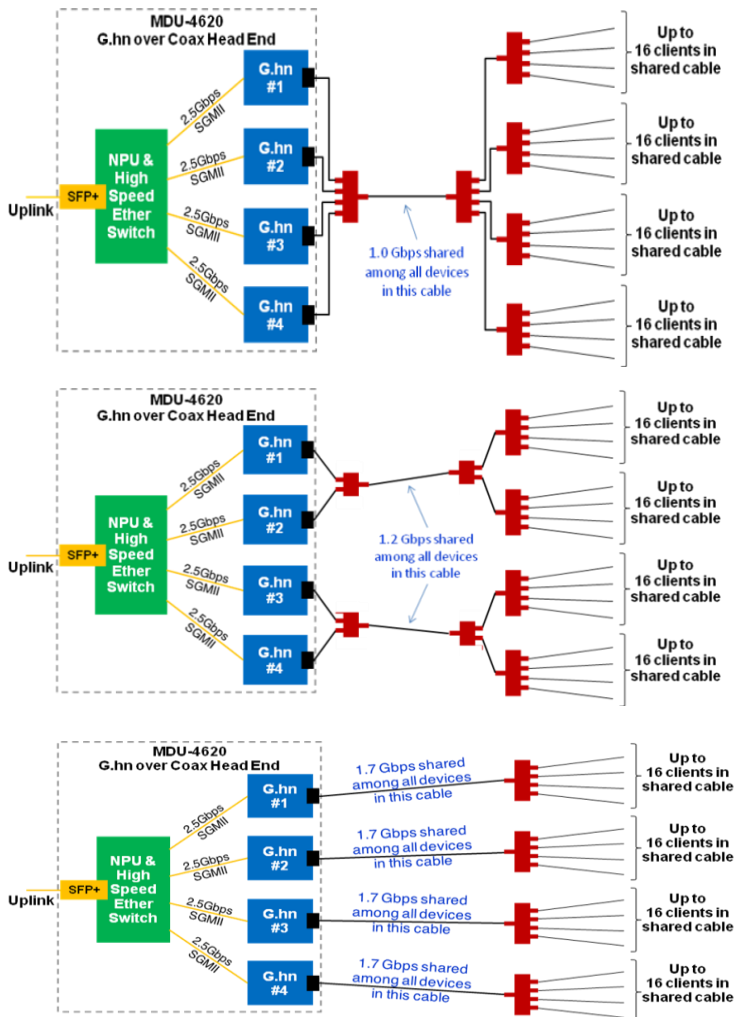

### ⚠ WARNING

Disconnect the power line from the device before servicing.  
Do NOT open the casing  
Do NOT use near water  
Keep away from the fire  
For use in ventilated environment / space

**CE Standards:**  
EN 55032 / EN 55035  
EN 62368-1

# COMTREND



**Taiwan:**  
3F-1, No.10, Lane 609, Chongxin Road, Section 5,  
Sanzhong Dist, New Taipei City 241405, Taiwan  
Tel: +886-2-29998261

**USA & Canada:**  
530 Technology Dr. Suite 100, Irvine,  
CA 92618, USA  
Tel: +1-949-753-9640

**Spain:**  
C/ Proción, 7 portal 2, 1º C - Edif. América II  
28023 Madrid, Spain  
Tel: 34-917990403

**Czech Republic:**  
TOKOVO Jankovcova 1518/2, 170 00, Prague 7,  
Czech Republic  
Tel: +420-266-782040

Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice.