

# G.hn over Coax Head End 1 port

G.hn wave2 over coaxial | SFP/1GBase-T Eth. Uplink

## MDU-4640



The **Comtrend MDU-4640** is a revolutionary G.hn wave2 over coaxial cable Head End with flexible SFP/1GBase-T Ethernet uplink hybrid approach providing the broadband service under the current coaxial cable network to the cable TV subscriber.

Combining the coaxial cable and broadband technologies, the MDU-4640 includes an SFP cage for versatile uplink interfaces (such as for 1G AE/ 2.5G AE/ GPON ONU MAC/ 1000Base-T SFP module), or with the built-in Gigabit Ethernet Port (RJ-45) to the GPON ONU. The point to multipoint network allows one MDU-4640 connect to 16 G.hn over coaxial wave2 CPEs and provides up to 1.7Gbps bandwidth. In addition, the Cable TV service will still work well (co-existing with the G.hn broadband data network).

### KEY FEATURES

- **G.hn wave2 over coaxial** cable technology
- One MDU-4640 connects to **16 units** G.hn over coaxial wave2 CPEs thru a single coaxial cable
- **Auto** configuration
- Max. **1.7Gbps** Aggregated Broadband service
- **Web GUI** for friendly and easy operation network management
- Supports **TR-069** for remote network management
- Value added Broadband service over current **CATV** network
- Uplink interface complies with **GPON/ 1G AE/ 1GBase-T**


# MDU-4640

| G.hn wave2 over coaxial | SFP/1GBase-T Eth. Uplink

## SPECIFICATIONS

HARDWARE	
<b>Ports</b>	1 Port F-connector (G.hn + CATV Output/Input) 1 Port F-Connector (CATV Input/Output) 1 Gigabit Ethernet port (RJ-45) 1 SFP
<b>LED Indicators</b>	Power, LAN, (G.hn) Link, SFP
<b>Power Input</b>	DC 12V/1A
<b>Dimensions</b>	133mm (D) x 70mm (W) x 38mm (H)
UPLINK (MDU-4640)	
<b>SFP module (Optional)</b>	GPON ONU MAC, 1G AE, 1GBase-T (RJ-45)
<b>Gigabit Ethernet (RJ-45)</b>	Built-in
G.HN WAVE2 MASTER	
<b>Standards</b>	Supports ITU-T G.9960/9961/9962/9963/9964 Unified high-speed wireline-based home networking transceivers
CABLE TV	
<b>Spectrum</b>	250MHz to 1200MHz
ENVIRONMENT	
<b>Operating Temperature</b>	0°C ~ 40°C (32°F ~ 104°F)
<b>Operating Humidity</b>	10% ~ 90% non-condensing
SOFTWARE	
<b>Features</b>	<ul style="list-style-type: none"><li>· Supports Up Stream/Down Stream bandwidth configuration</li><li>· Supports DHCP client, Fixed IP setting, Ipv6 passthrough, C-TAG VLAN, Management VLAN, Syslog, SNTP client, Multicasting</li><li>· Supports Web GUI as friendly management Interface</li><li>· TR-069 for remote management</li></ul>
<b>Certifications</b>	FCC, CE Class B

## APPLICATION DIAGRAM

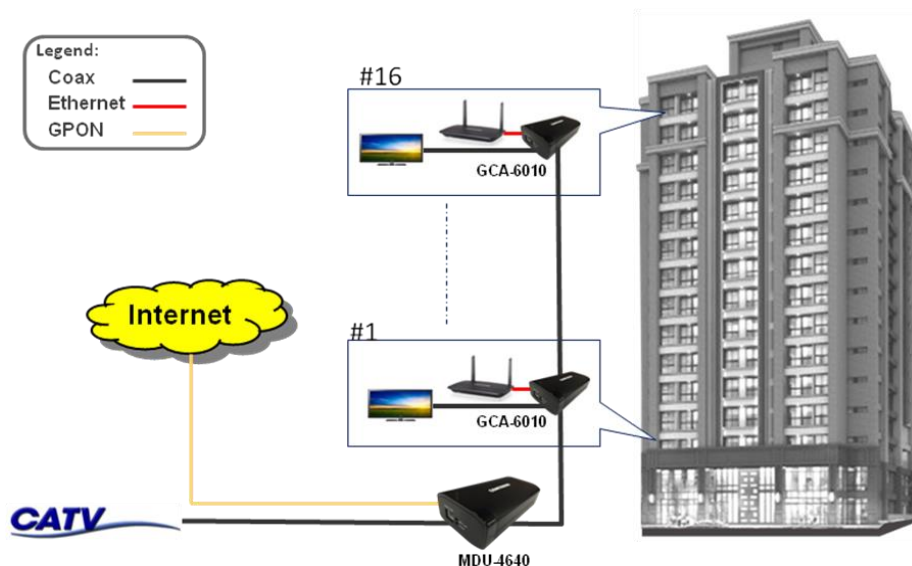

# COMTREND

**Taiwan:**  
3F-1, No.10, Lane 609, Chongxin Road, Section 5,  
Sanzhong Dist, New Taipei City 241405, Taiwan  
Tel: +886-2-29998261

**USA & Canada:**  
530 Technology Dr. Suite 100, Irvine,  
CA 92618, USA  
Tel: +1-949-753-9640

**Spain:**  
C/ Proci3n, 7 portal 2, 1º C - Edif. Am3rica II  
28023 Madrid, Spain  
Tel: 34-917990403

**Czech Republic:**  
TOKOVO Jankovcova 1518/2, 170 00, Prague 7,  
Czech Republic  
Tel: +420-266-782040

[www.comtrend.com](http://www.comtrend.com)

Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice.

DS\_MDU-4640\_V3.2