



As a next-generation converged PON technology, iXL series Chassis OLT provide GPON, XG-PON, XGS-PON, Combo PON access, and 100GE/25GE/10GE/GE uplinks. The device can be deployed in FTTH, FTTB, FTTC, FTTD, FTTM scenarios to provide service for residential subscribers, business customers, mobile and fixed backhauling, Wi-Fi hotspot backhaul, etc. The iXL series OLT include the following two models, which conform to ITU-T international standards.

Key Benefits

Unified Element Management System

The unified, centralized and large-capacity element management system (EMS) adopts a micro-service architecture, which can be deployed on physical or cloud platforms and expanded easily.

Unified Platforms for Different PON Cards

Provide GPON, XG-PON, XGS-PON and Combo PON cards with different rates. Each OLT's PON port can support the splitting ratio up to 1:128 (for GPON) and 1:256 (for XG(S)-PON). The maximum transmission distance is 20 kilometers.

Full Series Products

Provide full series of OLT products with different switch capacities and different sizes (2U, 7U), to meet various application scenarios of customers.



iXL2200 Chassis System

iXL2200-S2	Chassis (2U Front-access) with Backplane, Installation accessories, no Fan tray
iXL2200-FAN2A	Fan tray
iXL2200-CSM2S	Control & Switching Module, 4*10GE/GE uplink
iXL2200-PDC1C	DC Power supply module
iXL2200-PAC1C	AC Power supply module
iXL2200-DCCABLE	DC Power Cable Assy, 3m, DB connector to Open, 6mm ² , Blue Black

iXL2200-ACCABLE AC Power Cable Assy,2.5m,3Pin Plug to 3Pin Receptacle,
N.America standard plug, 3x1.0mm², Black

iXL2200-FCS Blank Faceplate for CSM Slots of iXL2200

iXL2700 Chassis System

iXL2700-S7 Chassis (7U Front-access) with Backplane, Installation accessories, no Fan tray

iXL2700-FAN3 Fan tray

iXL2700-PCU1S Peripheral Control Unit

iXL2700-PDC1A Power supply card

iXL2700-DCCABLE DC Power Cable Assy, 3m,OT16-6 to Open,16mm²,Blue Black

iXL2700-CSM3S Control & Switching Module, 4*25GE/10GE uplink

Service Cards

iXL2200-XSM2C 16*XG(S)PON&GPON Combo ports for iXL2200/iXL2700

iXL2200-XSM2A 8*XG(S)PON&GPON Combo ports for iXL2200/iXL2700

iXL2200-XGS1C 16*XGSPON/XGPON ports for iXL2200/iXL2700


iXL2200-GPN4C 16*GPON ports for iXL2200/iXL2700

iXL2200-XUC1A 8*25GE/10GE/GE ports for iXL2200/iXL2700

iXL2200-HUC1D 2*100GE ports for iXL2200/iXL2700

Product Model	iXL2200	iXL2700
Service Slots No.	2	8
Dimensions (mm)(WxDxH)	482.6x286x88 (19-inch width, 2U height)	482.6x286x310 (19-inch width, 7U height)
Weight	Full of cards:10 kg Chassis only:4.5 kg	Full of cards:28 kg Chassis only:11.5 kg
CSM Switching Capacity	960 Gbps	7.2 Tbps
Power Supply	DC/AC(1+1 redundancy)	DC(1+1 redundancy)
Typical Consumption	308 W	754 W
Reliability	CSM 1+1 redundancy / PON Protection	CSM 1+1 redundancy / PON Protection
Max No. of GPON Port	32	128
Uplink Port No. (CSM)	2*4*10GE/GE	2*4*25GE/10GE

Operating Temperature	0 to 40°C	0 to 40°C
Operating Humidity	10 to 90% (non-condensing)	10 to 90% (non-condensing)
Storage Temperature	-40 to +70°C	-40 to +70°C
Storage Humidity	5 to 95% (non-condensing)	5 to 95% (non-condensing)

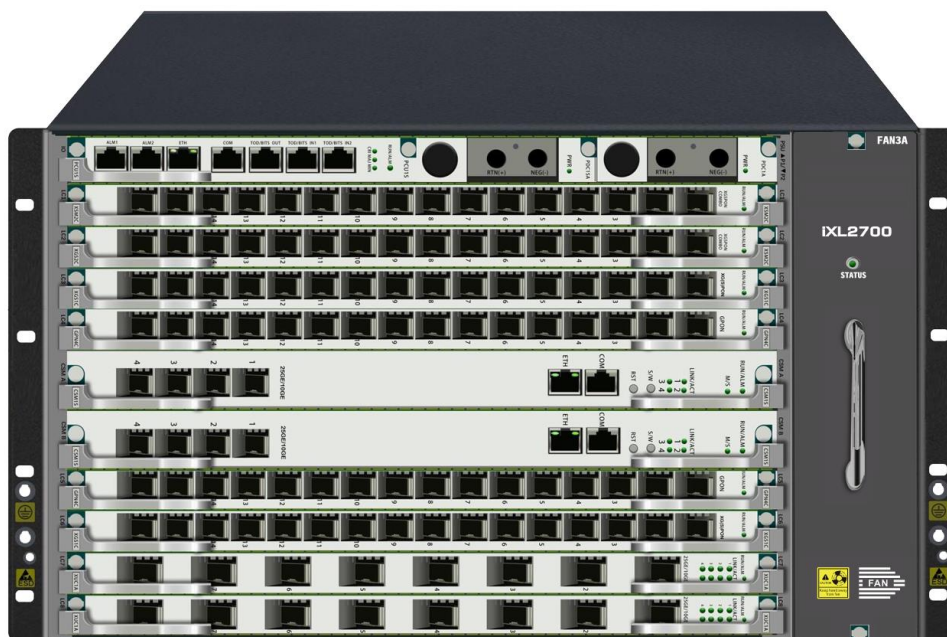

Taiwan:

3F-1, No.10, Lane 609,
Chongxin Road, Section 5,
Sanchong Dist, New Taipei
City 241405, Taiwan
Tel: +886-2-29998261

USA & Canada:

530 Technology Dr.
Suite 100, Irvine,
CA 92618, USA
Tel: +1-949-753-9640

Spain:

C/ Proción, 7 portal 2, 1º C
- Edif. América II
28023 Madrid, Spain
Tel: 34-917990403

Czech Republic:

TOKOVO Jankovcova
1518/2, 170 00, Prague 7,
Czech Republic
Tel: +420-266-782040