

ADSL2+/VDSL2

4 Ethernet Ports | 1 USB Host | 802.11n

VR-3031u Wireless Router



The VR-3031u is an 802.11n compliant Multi-DSL router that supports both ADSL2+ and VDSL2. VDSL2 is a brand new standard and technology perfect for triple play (Video, Voice and Data) applications. The VR-3031u comes with four 10/100 Base-T Ethernet ports, and one USB host, combining wired LAN connectivity and an integrated 802.11n WiFi WLAN Access Point (AP) for wireless connectivity.

The VR-3031u is a cost effective solution designed to meet the needs of ISPs and carriers planning on deploying a single DSL device for covering end users in different loop range areas. Deploying VR-3031u is cost effective for ISPs and carriers because deploying a single CPE DSL device with multiple profile support minimizes the number of required upgrades.

FEATURES

- . Annex A, UPnP, IPv6 compliant
- . Automatically switches to ADSL2+/ VDSL2 according to the port setting of DSLAM
- . Supports up to VDSL2 17a Profile
- . PhyR and G.INP
- . G.vector
- . Up to 16 PVCs
- . Up to 8 PTM flows
- . Supports TR-069/TR-098/TR-111
- . Configuration backup and restoration
- . Supports TR-064
- . Web-based management (HTTPS/HTTP)
- . Supports remote administration, automatic firmware upgrade and configuration
- . Integrated 802.11n AP (backward compatible with 802.11b/g)
- . WPA and 802.1x/ WPS 2.0/ RADIUS client
- . NAT/PAT
- . Supports SP/WFQ/WRR for QoS
- . Per-PVC packet level QoS
- . IGMP Proxy/ fast leave/ Snooping/ Proxy
- . DHCP Server/Client
- . Embedded SNMP agent
- . IP/MAC address filtering
- . Static route/ RIP/ RIP v2 routing function
- . DNS Proxy/Relay
- . 3G Backup/ Printer Server (IPP)/ File sharing
- . FTP/TFTP server

VR-3031u

4 Ethernet Ports | 1 USB Host | 802.11n

SPECIFICATIONS

Hardware

- RJ-11 X 1 for ADSL2+/VDSL2
- RJ-45 X 4 for LAN, (10/100 BaseT)
- Reset button X 1
- WPS /WiFi on/off button X 1
- Power switch X 1
- USB host X 1

WAN

- Comply with ITU-T G.992.5, ITU-T G.992.3, ITU-T G.992.1, ANSI T1.413 Issue 2, AnnexM
- ADSL2+: Downstream : 24 Mbps Upstream : 1.3 Mbps
- Comply with G.993.2 (supporting profile 8a, 8b, 8c, 8d, 12a, 12b, 17a)
- VDSL2: Downstream : 100Mbps Upstream : 60Mbps

LAN

- IEEE 802.3, IEEE 802.3u
- Support MDI/MDI-X
- 10/100 BaseT Auto-sense

Wireless

- IEEE802.11b/g/n
- 64, 128-bit Wired Equivalent Privacy (WEP) Data Encryption
- 11 Channels (US, Canada)/ 13 Channels (Europe)/ 14 Channels (Japan)
- Up to 300Mbps data rate
- MAC address filtering, WEP, WPA, IEEE 802.1x
- 10,25,50,100mW@22MHz channel bandwidth output power level can be selected according to the environment

ATM Attributes

- RFC 2364 (PPPoA), RFC 2684 (RFC 1483) Bridge/Route; RFC 2516 (PPPoE); RFC 1577 (IPoA)
- Support up to 16 PVCs
- AAL5
- UBR/CBR/VBR
- UNI 3.1/4.0
- OAM F4/F5

PTM Attributes

- ATM Adaptation Layer: Ethernet packet format,
- Support 8 flows,
- Support preemption and dual latency,
- Support PTM shaping

Management

- TR-069/TR-098/TR-104/TR-111, SNMP, Telnet, Web-based management, Configuration backup and restoration
- Software upgrade via HTTP, TFTP server, or FTP server

Bridge Functions

- Transparent bridging and learning: IEEE 802.1d
- VLAN support
- Spanning Tree Algorithm
- IGMP Proxy

Routing Functions

- Static route, RIP, and RIPv2, NAT/PAT, DHCP Server/ DHCP Relay, DNS Proxy, ARP

Security Functions

- Authentication protocols: PAP, CHAP
- TCP/IP/Port filtering rules, Port triggering/Forwarding, Packet and MAC address filtering, access control, SSH

QoS

- L3 policy-based QoS, IP QoS, ToS

Application Passthrough

- PPTP, L2TP, IPSec, SIP, Yahoo messenger, ICQ, RealPlayer, NetMeeting, MSN, X-box, etc.

Power Supply

- Input: AC 100-240V, Output: DC 12V/ 1.0A

Environment Condition


- Operating temperature: 0 ~ 40 degrees Celsius
- Relative humidity: 5 ~ 95% (non-condensing)

Dimensions

- 171 mm (W) x 39 mm (H) x 122 mm (D)

Kit Weight (1*VR-3031u, 1*RJ11 cable, 1*RJ45 cable, 1*power

- adapter)
- 0.6 kg

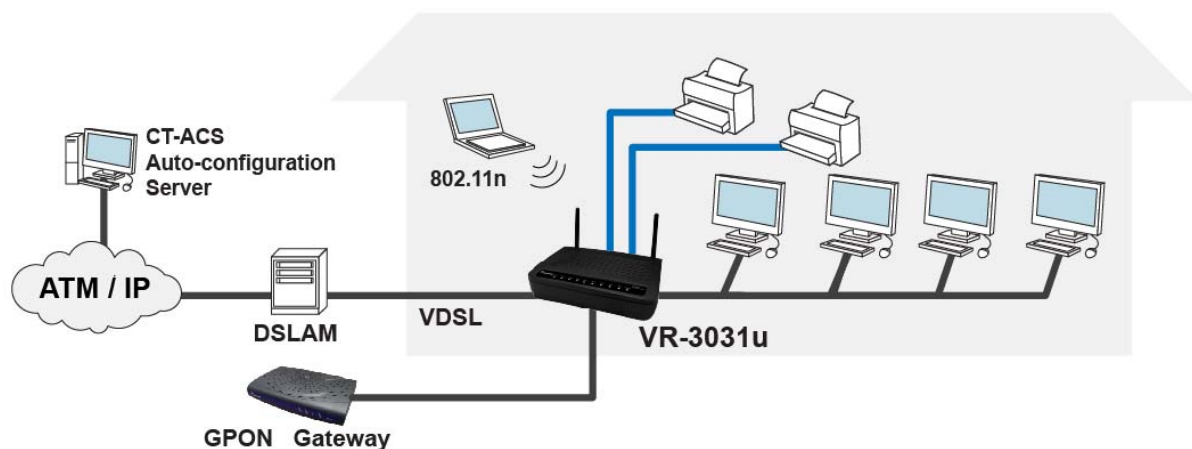

Taiwan:
3F-1, No. 10, Lane 609, Chongxin Road, Section 5,
Sanchong Dist, New Taipei City 24159, Taiwan
Tel: 886-2-2999-8261
Fax: 886-2-2999-8497

China:
1F, No. 88 Building M1 East QianJin Road,
Kunshan City, PC: 215300, China
Tel: 86-512-57383156
Fax: 86-512-57383155

Spain:
Edif. América II C/Prócion,7 portal 3 bajo H 28023 Madrid,
Spain
Tel: 34-917990403
Fax: 34-913510999

France:
8, Rue Edouard Naud
92130 Issy-Les-Moulineaux, France
Tel: 33-1-78463600
Fax: 33-1-78463601

Czech Republic:
TOKOVO Jankovcova 1518/2, 170 00, Prague 7,
Czech Republic
Tel: 420-266-782040
Fax: 420-266-782990

USA & Canada:
16 Goodyear, Suite 120, Irvine, CA 92618
Tel: 1-949-7539640
Fax: 1-949-7539020

Brazil:
Av. Brig. Luis Antonio, 2466 Room 64 - Jardim Paulista -
São Paulo - SP - zip code: 01402-000
Tel: 00 55 11 3052-2295
Fax: 00 55 11 3052-2295